

TABLE: SUPPLY VOLTAGE AS A FUNCTION OF FREQUENCY AND TEMPERATURE

PROCESSOR TEMPERATURE				
Clock	100°C	60°C	20°C	-20°C
100 MHz	1.0V	0.95V	0.90V	0.8V
200 MHz	1.2V	1.1V	1.0V	0.9V
300 MHz	1.4V	1.25V	1.15V	1.0V
400 MHz	1.6V	1.4V	1.25V	1.1V

FIG. 1

ę

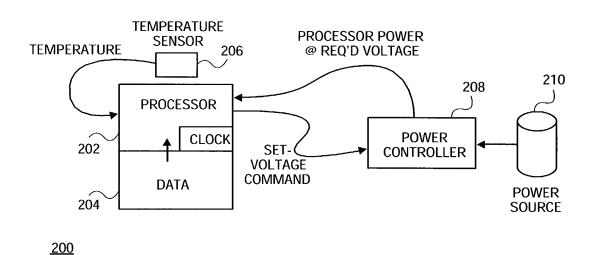


FIG. 2

